



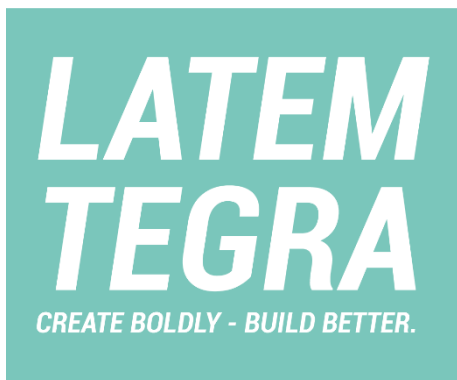

The sandy texture of the four colours in the LATEM Tegra range gives the aluminium a high quality matt appearance, while offering increased resistance to minor imperfections and scratches that may occur.

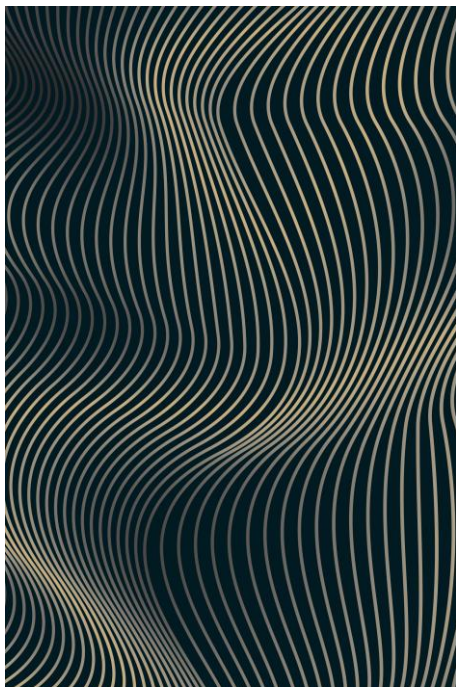

For more information, please contact us or visit www.latemaluminium.com

This document describes only the characteristics of LATEM Tegra. It is the responsibility of the installer and the project manager to check that other products and techniques used on site are suitable and compatible with this material.

Aluminium

Rolling standard	EN 485-2 (mechanical properties), 485-4 (dimensional tolerances)
Alloys/EN573-3	EN AW-3005/3105

Mechanical properties

Rp0,2 N/mm ²	>105
Rm N/mm ²	130 - 200
Elongation A50 (%)	> 5
Young's modulus N/mm ²	70.000
Temper	H42
Bending test	No cracks 1.5T
	No delamination ≤ 1.0T
Film	Supplied without film

Formats

Thickness (mm)	0,7 and 1
Width (mm)	500 – 650 – 1000 – 1250
Inner coil diameter (mm)	300 or 508
Sheets Length (mm)	2000 to 6000

Finishes according to EN1396

Corrosion resistance index (EN 1396:2015)	3
Ultraviolet resistance (EN 1396:2015)	Ruv4
Blue tinted back side finish	
Top side finish	VHDPE textured
Top side coating thickness	35 micras
Back side finish	blue tinted
Back side coating thickness	5 micras
Bilacquered finish	
Top side finish	VHDPE textured
Top side coating thickness	35 micras
Back side finish	VHDPE non-textured
Back side coating thickness	35 micras

Fire behaviour

Reaction to fire s/EN13501-1	A1
Fire performance s/EN13501-5	B _{roof} (t1)